





Piston spool, indirectly operated
5/2- or 3/2-Wege, convertible
Pneumatic connection: NAMUR- plate
Manual override: self-locking
Medium: cleaned, lubricated/non-lubricated compressed air
Compressed air quality level 5 acc. to ISO 8573-1
elektr. connection: Plug socket Form B, M16
Temperature range: -20°C up to +50°C
Operating pressure: 2...10 bar
Degree of protection: IP 65

Voltage	Article number
12 V DC	MV-532-012-NE
24 V DC	MV-532-024-NE
110 V DC	MV-532-110-NE
48 V AC	MV-532-048-NE
115 V AC	MV-532-115-NE
230 V AC	MV-532-230-NE

Incl. Plug socket M16 for cable diameter 5-6 mm
SIL2 acc. to IEC 61508

Dimensions

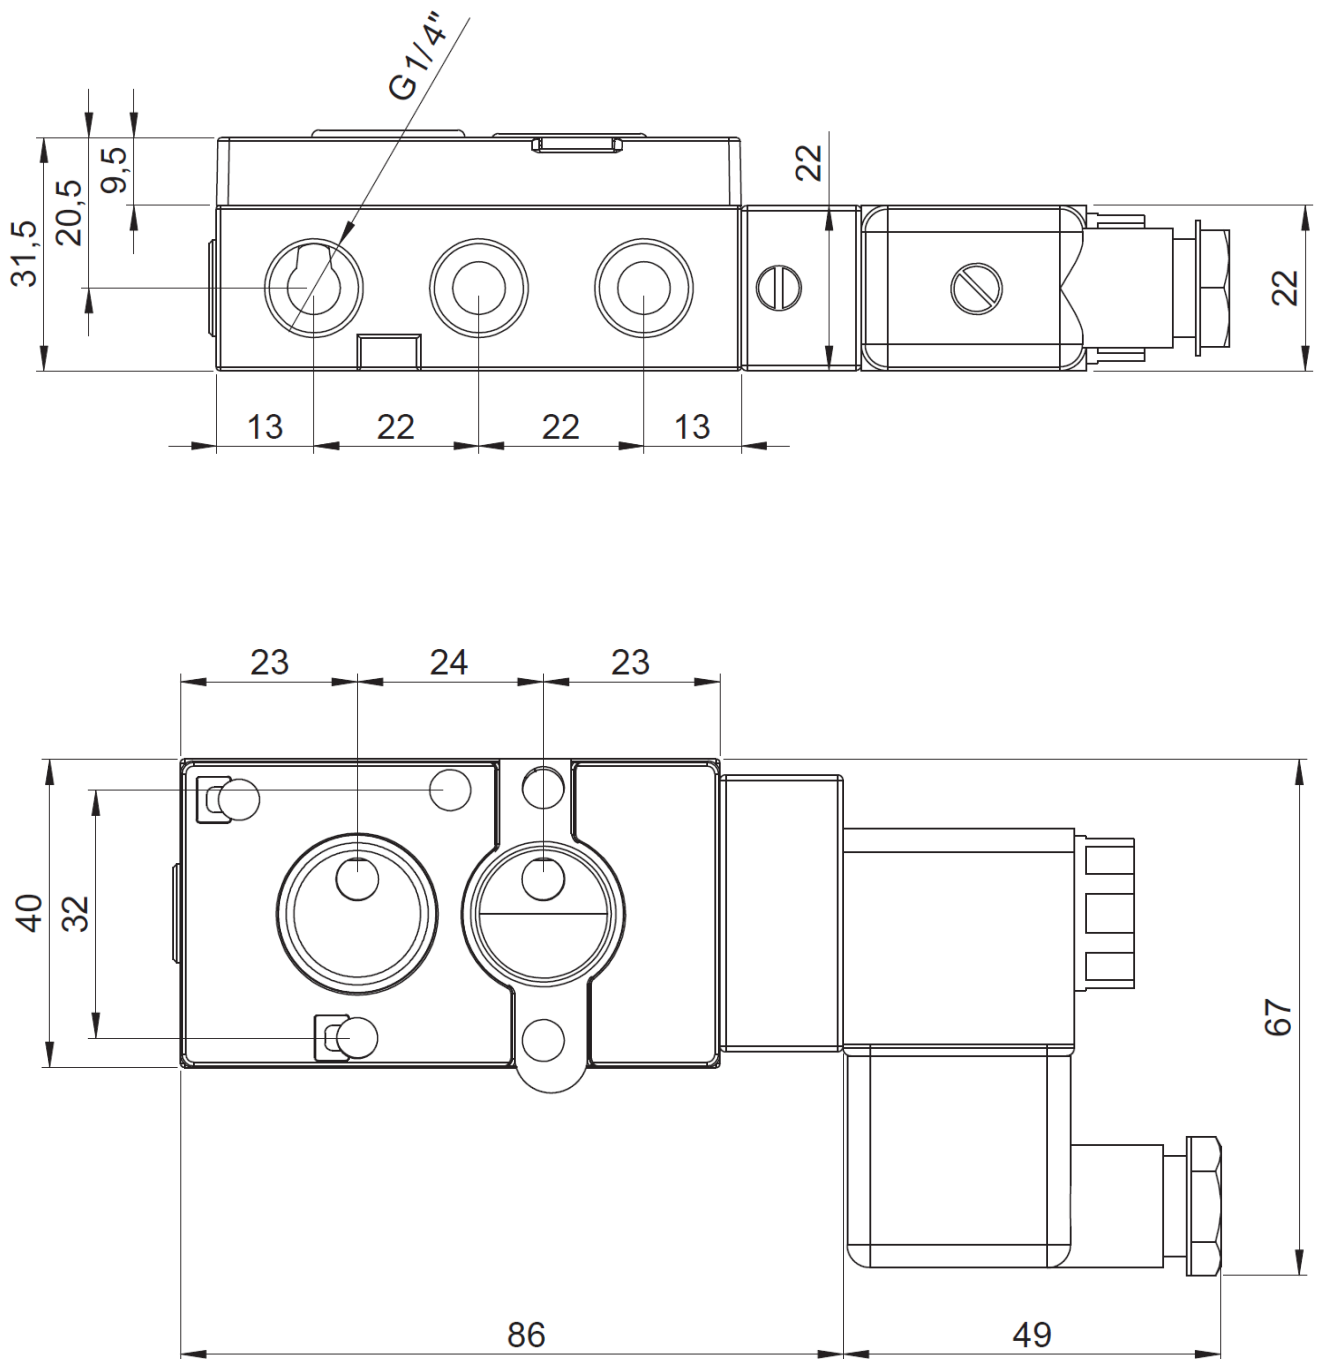

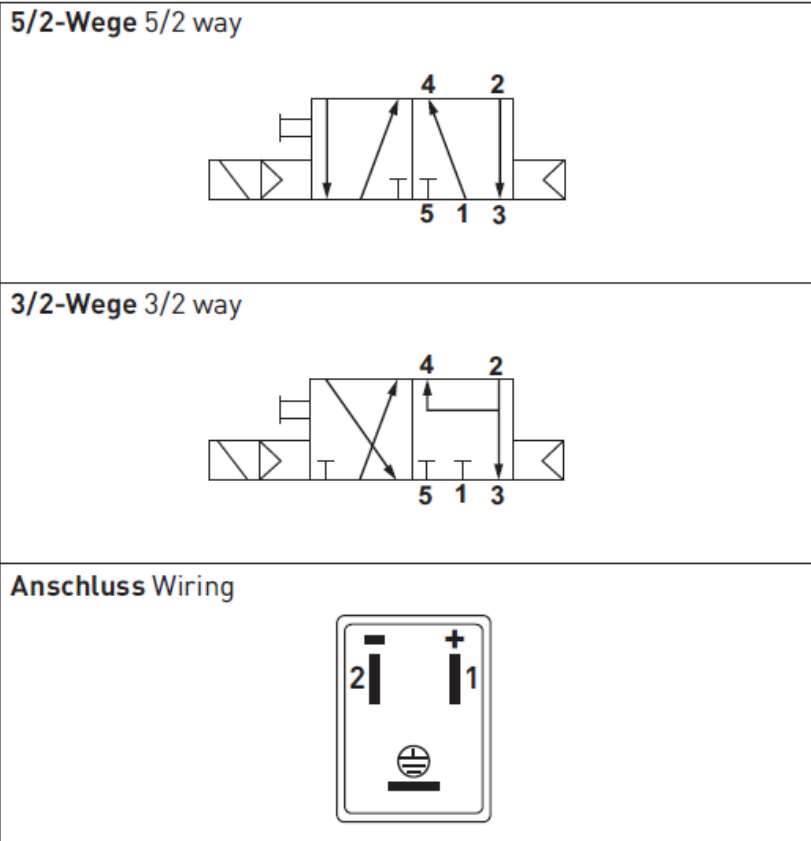

Technical data

Pneumatic connection	Female thread, G 1/4"
Nominal diameter	5,5 mm
Operating pressure	2...10 bar
Degree of protection	IP65 acc. to DIN 40050
Power consumption	DC: 3 W / AC: 5 VA
Flow rate	950 l/m

Reversing sealing

