

Stainless Steel Ball Valve DIN3202-M3 MKH-WA-2IG 2-pcs. Body, with Female Threads






Nominal pressure: PN63
End-to-End: DIN EN 16722 M3 (DIN3202)
Connections: Internal thread on both sides
DIN EN ISO 228-1
Body: Stainless steel (1.4408)
Ball: Stainless steel (1.4408)
Ball seats: PTFE
Full bore
Blow-out-proof stem made of stainless steel
Anti-static design
lockable hand lever

Zulassungen/Zertifikate:



AD 2000

Nominal Diameter / Size	Nominal Pressure	Article number
DN8	PN63	MKH-WA-2IG-1/4"
DN10	PN63	MKH-WA-2IG-3/8"
DN15	PN63	MKH-WA-2IG-1/2"
DN20	PN63	MKH-WA-2IG-3/4"
DN25	PN63	MKH-WA-2IG-1"
DN32	PN63	MKH-WA-2IG-1 1/4"
DN40	PN63	MKH-WA-2IG-1 1/2"
DN50	PN63	MKH-WA-2IG-2"
DN65	PN63	MKH-WA-2IG-2 1/2"
DN80	PN63	MKH-WA-2IG-3"

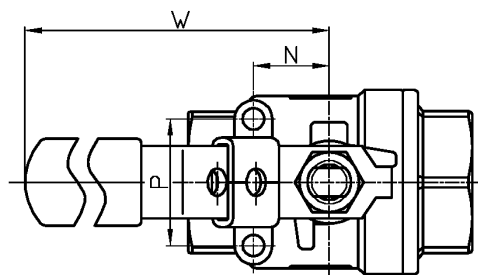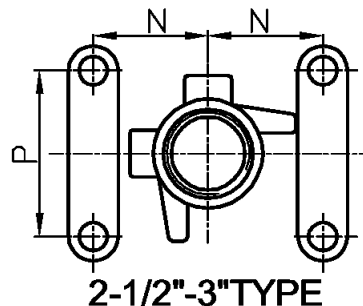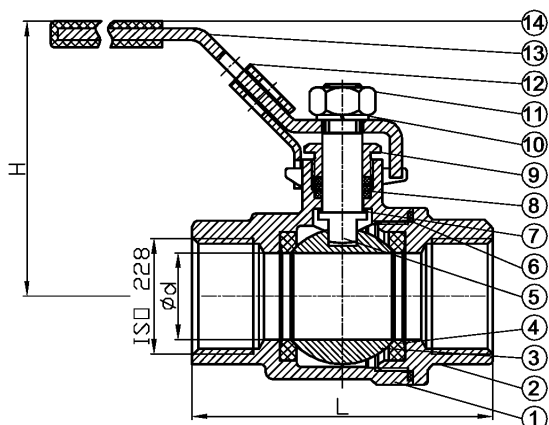

Materials		
No.	Description	Material
1	Body	Stainless Steel (1.4408)
2	Body end	Stainless Steel (1.4408)
3	Ball	Stainless Steel (1.4408)
4	Ball Seat	PTFE
5	Stem	316
6	Body Gasket	PTFE
7	Stem Gasket	PTFE
8	Packing	PTFE
9	Bushing	304
10	Belleville Washer	304
11	Stem Nut	304
12	Locking Device	304
13	Handle	304
14	Handle Sleeve	Plastik

Dimensions in mm							
Nominal diameter / Size	Ød	L (DIN3202-M3)	H	W	P	N	Weight (KG)
DN8	11,6	52	52	102	28,5	12,7	0,27
DN10	12,7	60	54	102	28,5	12,7	0,28
DN15	15	75	62	123	28,5	12,7	0,32
DN20	20	80	66	123	35	22,4	0,5
DN25	25	90	77	153	35	22,4	0,74
DN32	32	110	80	153	38,1	25,4	1,28
DN40	38	120	91	183	38,1	25,4	1,95
DN50	50	140	98	183	38,1	25,4	3,07
DN65	65	185	138	246	70	30	5,8
DN80	80	205	149	246	70	30	10,1