




3-piece Ball valve with welding ends
KH-WA-3AE
Stainless Steel

Nominal Pressure: PN63
Face to face acc. to DIN 3202-S13
Welding ends on both sides
acc. to ISO 1127, DIN 2463
Body: Stainless Steel (1.4408)
Ball: Stainless Steel (1.4408)
Ball Seats: R-PTFE
Full Bore
Blow-out Proof Stem in Stainless Steel
Anti-Static-Design
incl. lockable handlever

Nominal Diameter	Nominal Pressure	Article number
DN8	PN63	KH-WA-3AE-1/4"
DN10	PN63	KH-WA-3AE-3/8"
DN15	PN63	KH-WA-3AE-1/2"
DN20	PN63	KH-WA-3AE-3/4"
DN25	PN63	KH-WA-3AE-1"
DN32	PN63	KH-WA-3AE-1 1/4"
DN40	PN63	KH-WA-3AE-1 1/2"
DN50	PN63	KH-WA-3AE-2"
DN65	PN63	KH-WA-3AE-2 1/2"
DN80	PN63	KH-WA-3AE-3"
DN100	PN63	KH-WA-3AE-4"

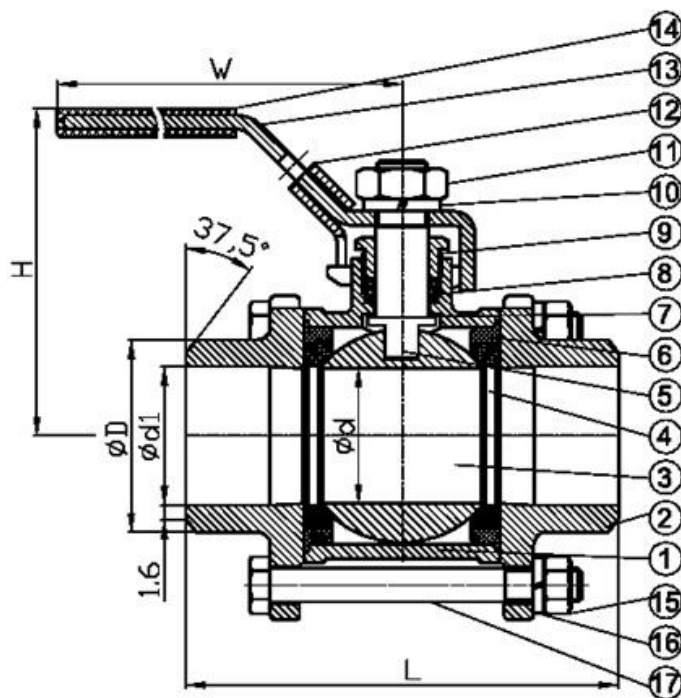

Dimensions in mm					
Nominal Diameter	$\varnothing d$	L (DIN3202-S13)	H	W	C
DN8	9,6	70	57	102	40,5
DN10	12,5	70	57	102	40,5
DN15	15	75	65	123	47
DN20	20	90	67	123	53,5
DN25	25	100	79	153	59,6
DN32	32	110	84	153	74,2
DN40	38	125	92	183	84
DN50	50	150	99	183	101
DN65	65	190	136	246	132
DN80	80	220	146	246	161,5
DN100	100	270	168	503	191

Material of Construction		
No.	Part Name	Material
1	Body	Stainless Steel, CF8M
2	Welding ends	Stainless Steel, CF8M
3	Ball	Stainless Steel, CF8M
4	Ball Seat	15% R-PTFE
5	Spindle	316
6	Body Gas	PTFE
7	Stem Gasket	15% R-PTFE
8	Packing	PTFE
9	Bushing	316
10	Belleville Washer	304
11	Stem Nut	304
12	Rotation lock	304
13	Hand lever	304
14	Handle sleeve	Plastik
15	Bolt Nut	304
16	Spring washers bolts	304
17	Body bolts	304