






Pilot operated solenoid valve
3/2-way
Intrinsically safe, only with spool type 11 G 52
Connections acc. to NAMUR and G1/4"
Integral spring chamber ventilation
(protection against the penetration of aggressive ambient air)
Medium: filtered, lubricated or lubricant-free compressed air
Pressure range: 0 (2) ...8 bar
Temperature range: -25°C bis +60°C
Degree of protection: IP65
With TÜV-approval SIL 2

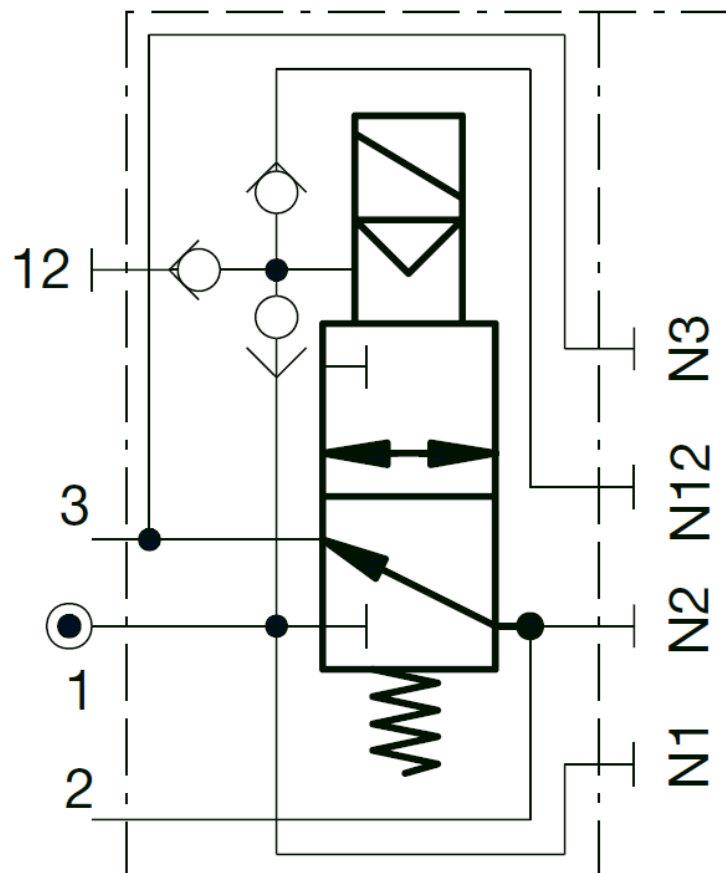

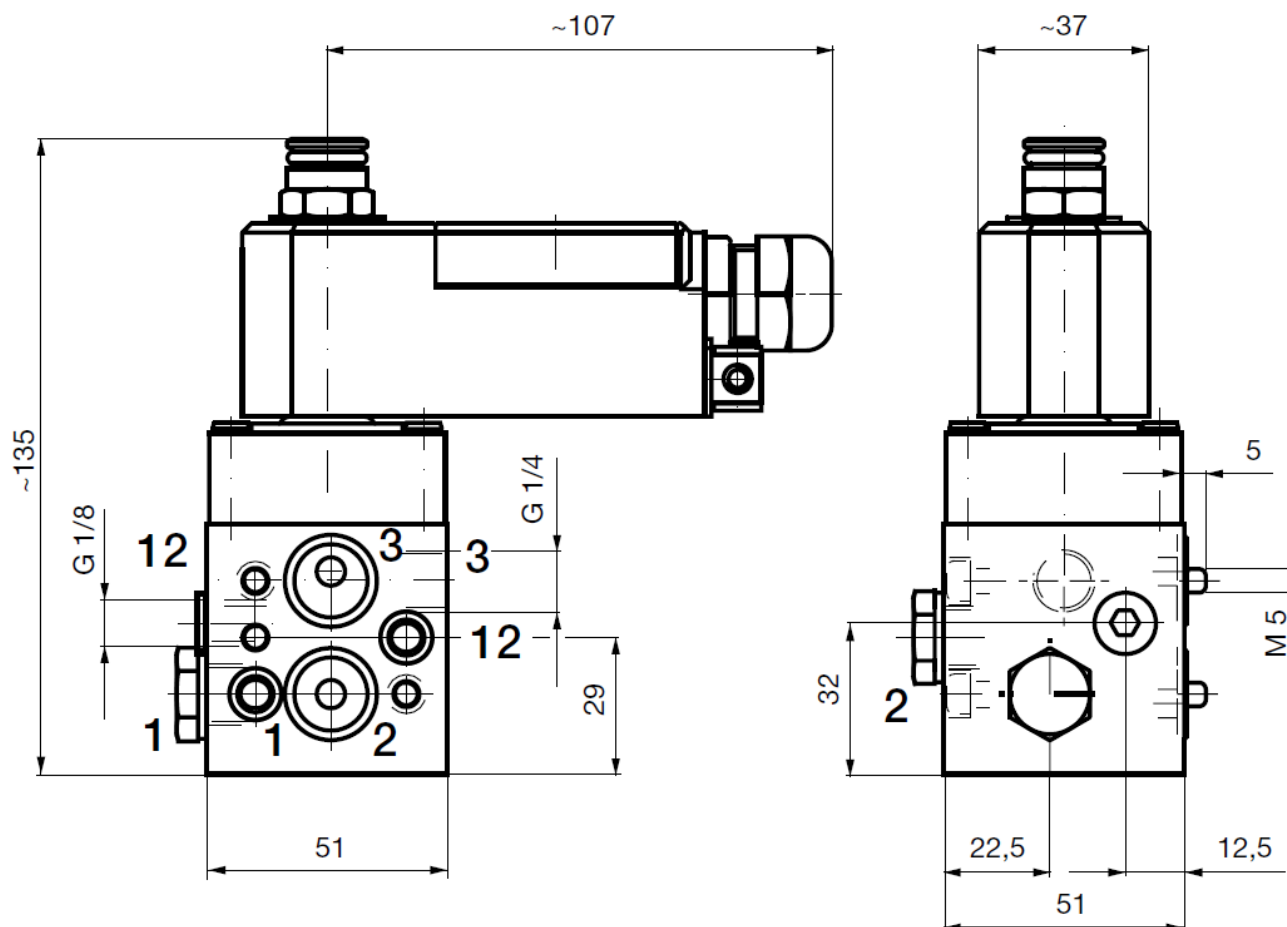

Material

Body	Aluminium ematal coated
Seals	Nitrile-butadiene rubber (NBR)
Spool	Aluminium altef coated
Internal parts	Various materials
General	Non ferrous metal free
End plugs	Brass nickle plated

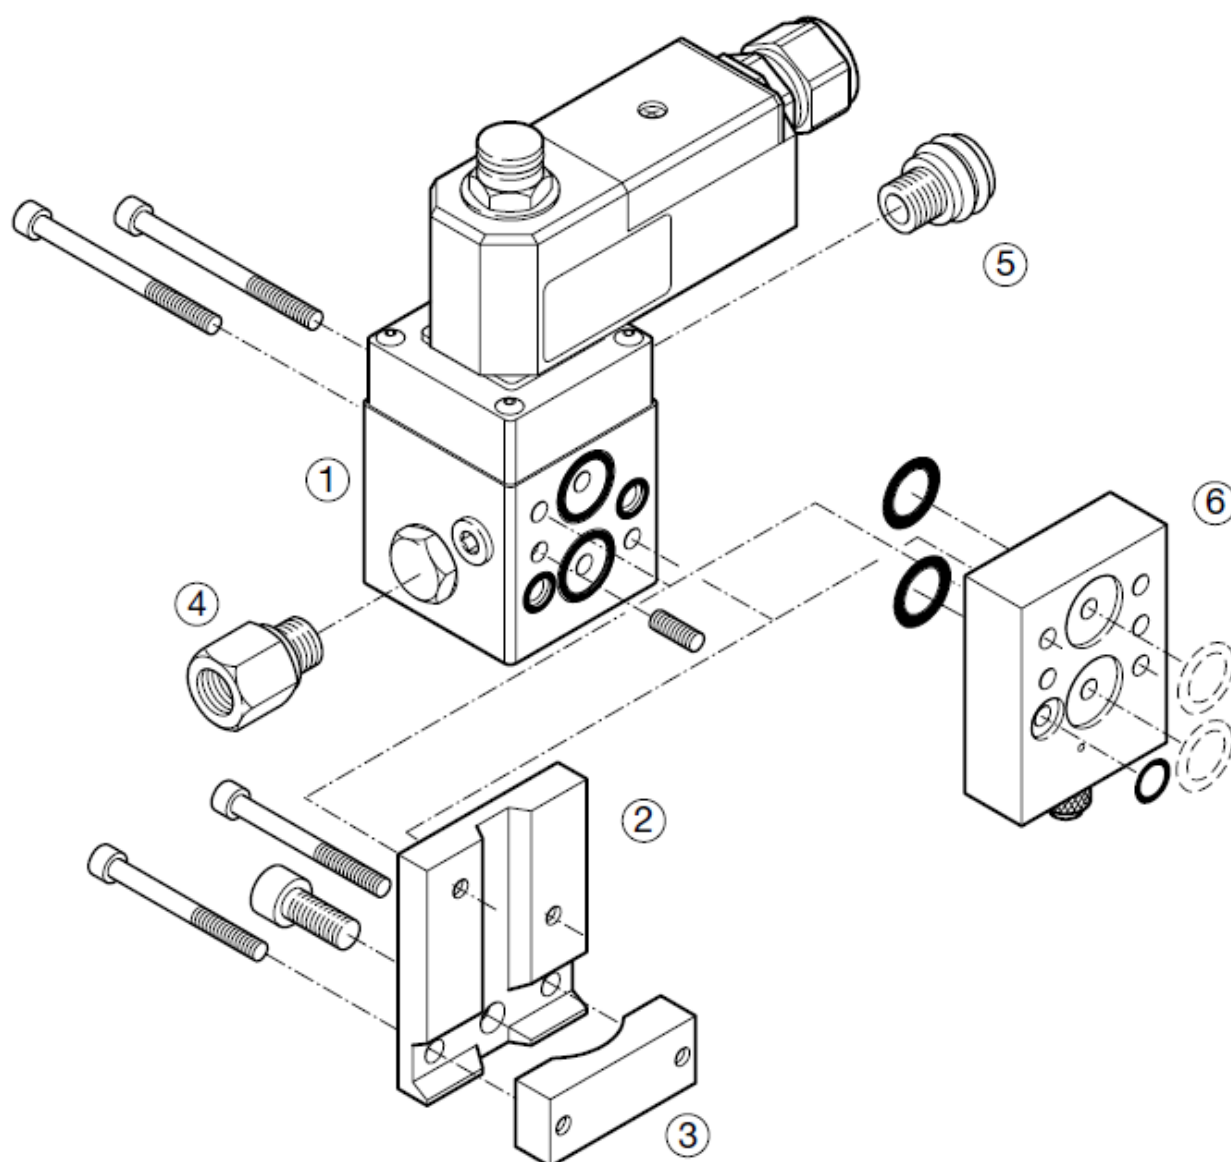

Components and accessoires

1	Solenoid valve with type 52 solenoid and NAMUR-interface
2	Mounting plate
3	Clamp complete (only necessary for attachment to NAMUR lantern)
4	Adapter with filter
5	Exhaust protector
6	NAMUR flow control plate